


CPM A

Corner Arch bead with fiberglass mesh

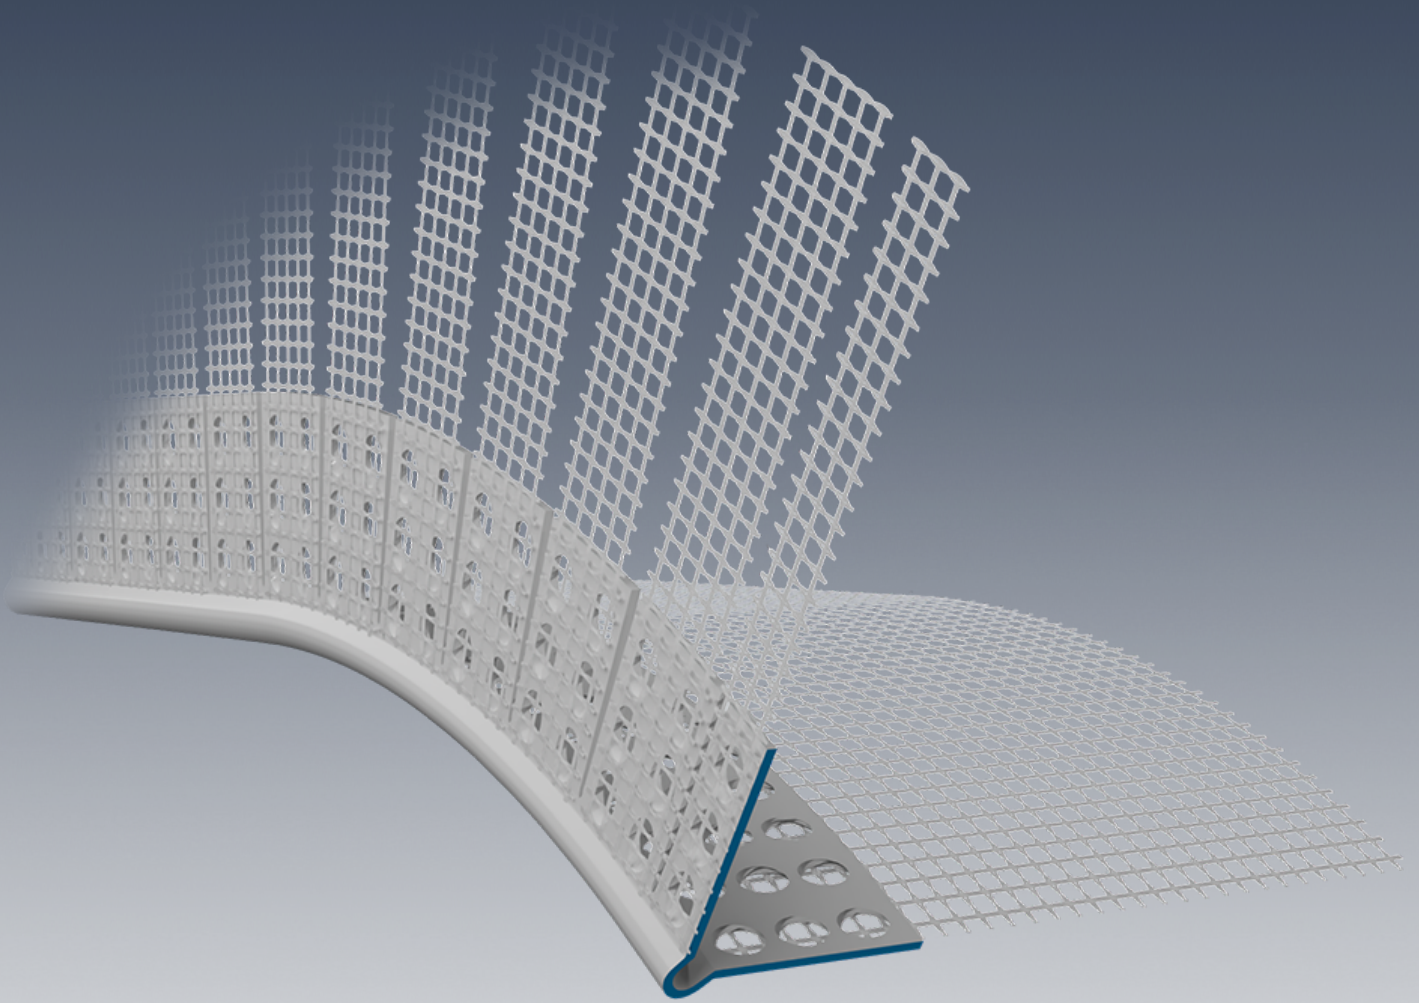

NiP Spasic

Corner Arch bead with fiberglass mesh

Length 2,5m

An arch bead with fiberglass mesh is used for mechanical protection of arched corners of different radii. Prevents tears on the final layer of facade along with easy-to-form creation of precise corners resistant to mechanical damage.



Hard PVC





Fiberglass mesh

Mesh: Performance Grade: ETAG 004 Compliant


High Quality mesh

Adhesive PUR HM

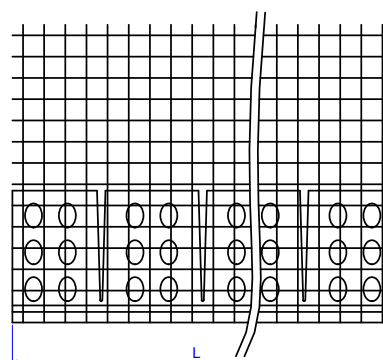

Technical drawing

Application

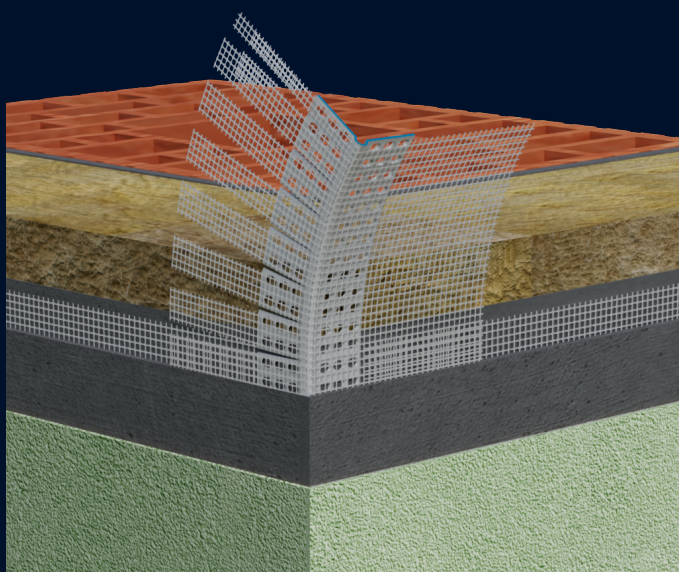

Dimensions

Lp - 23mm / 31mm

L1/L2 - 10 cm

CORNER PROFILES



NiP Spasic

1

Apply Adhesive

Trowel a layer of facade base coat adhesive along the corner of the installed insulation boards.

2

Embed the Corner Bead

Press the corner bead firmly into the fresh adhesive, ensuring it is plumb and perfectly straight. The corner bead with fiberglass mesh must be fully embedded in the adhesive for a proper bond.

3

Finish the Surface

Smooth out the adhesive to hide the profile edges, ensuring a seamless transition despite the profile's thickness relative to the mesh. Finish by applying the final facade layer across the entire wall area.

We invite you to reach out to our team to discuss our custom packaging solutions.

Packaging

50pcs / 42 boxes

100pcs / 82 boxes



Application must be carried out in ambient temperatures between +5°C and +35°C*.



Installation is to be performed by qualified and trained professionals only.



Store at dry place, not directly on Sun.