


CPM

Corner bead with fiberglass mesh

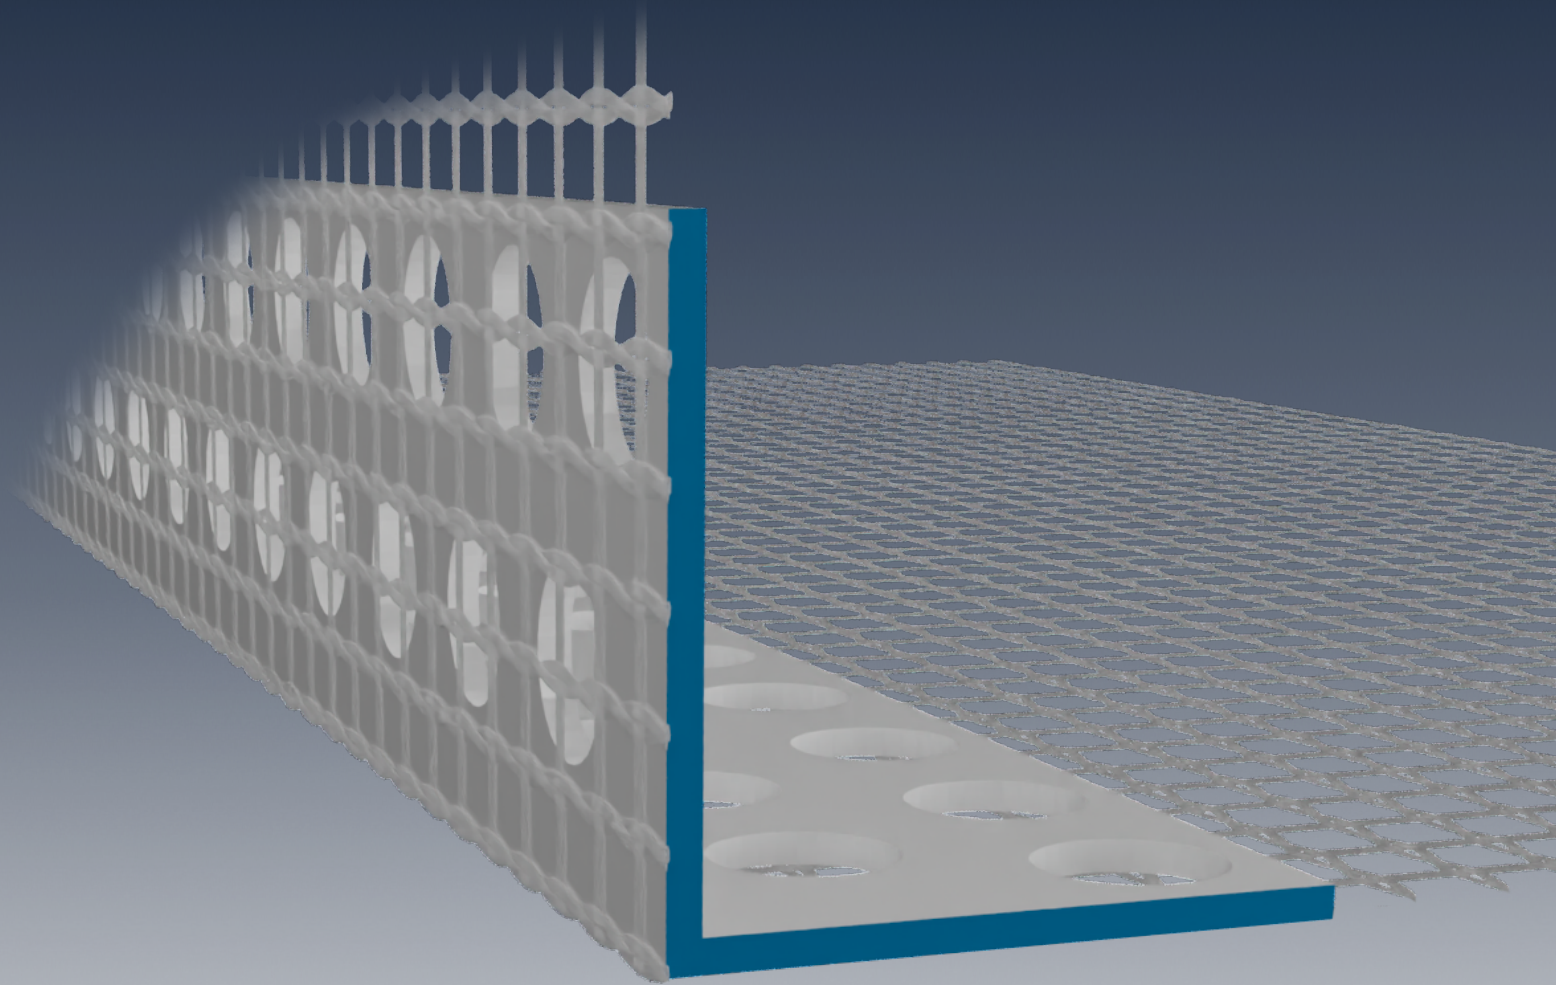

NiP Spasic

Corner bead with fiberglass mesh

Length 2m / 2,5m / 3m

This profile is used to create a durable, perfectly straight, and impact-resistant edge on the external corners of an insulation or render system. Its fiberglass mesh provides superior reinforcement and prevent cracking by seamlessly tying the corner into the main facade.





Hard PVC



Fiberglass mesh


Mesh: Performance Grade: ETAG 004 Compliant

Adhesive PUR HM

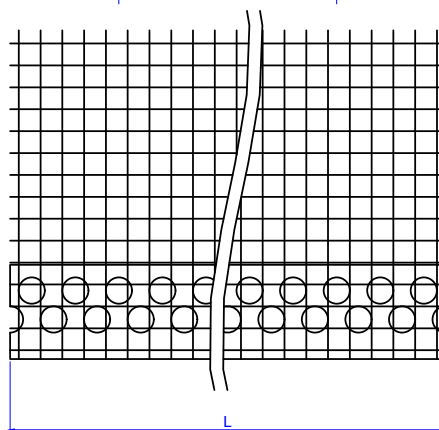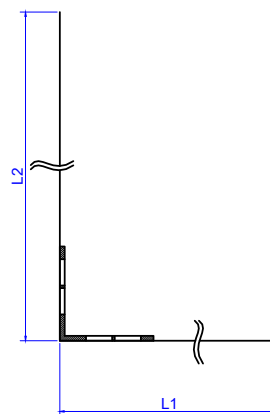

Technical drawing

Application

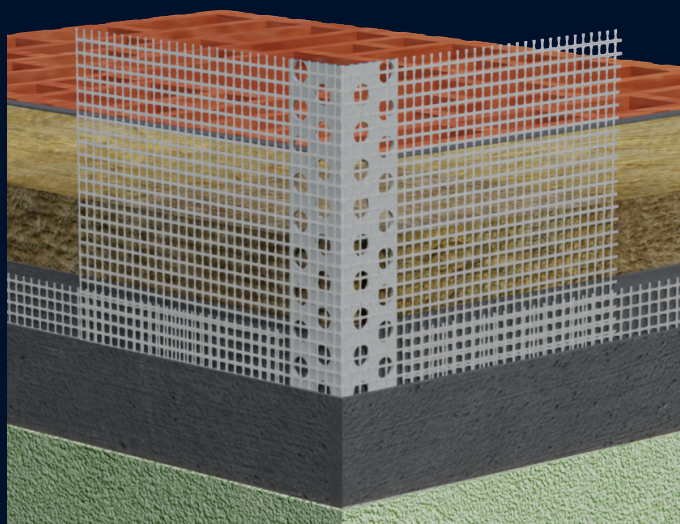

Dimensions

L1 - 10cm

L2 - 10cm / 15cm / 23cm

CORNER PROFILES



NiP Spasic

1

Apply Adhesive

Trowel a layer of facade base coat adhesive along the corner of the installed insulation boards.

2

Embed the Corner Bead

Press the corner bead firmly into the fresh adhesive, ensuring it is plumb and perfectly straight. The corner bead with fiberglass mesh must be fully embedded in the adhesive for a proper bond.

3

Finish the Surface

Smooth out the adhesive to hide the profile edges, ensuring a seamless transition despite the profile's thickness relative to the mesh. Finish by applying the final facade layer across the entire wall area.

We invite you to reach out to our team to discuss our custom packaging solutions.

Packaging

50pcs / 42 boxes

100pcs / 82 boxes



Application must be carried out in ambient temperatures between +5°C and +35°C*.



Installation is to be performed by qualified and trained professionals only.



Store at dry place, not directly on Sun.