
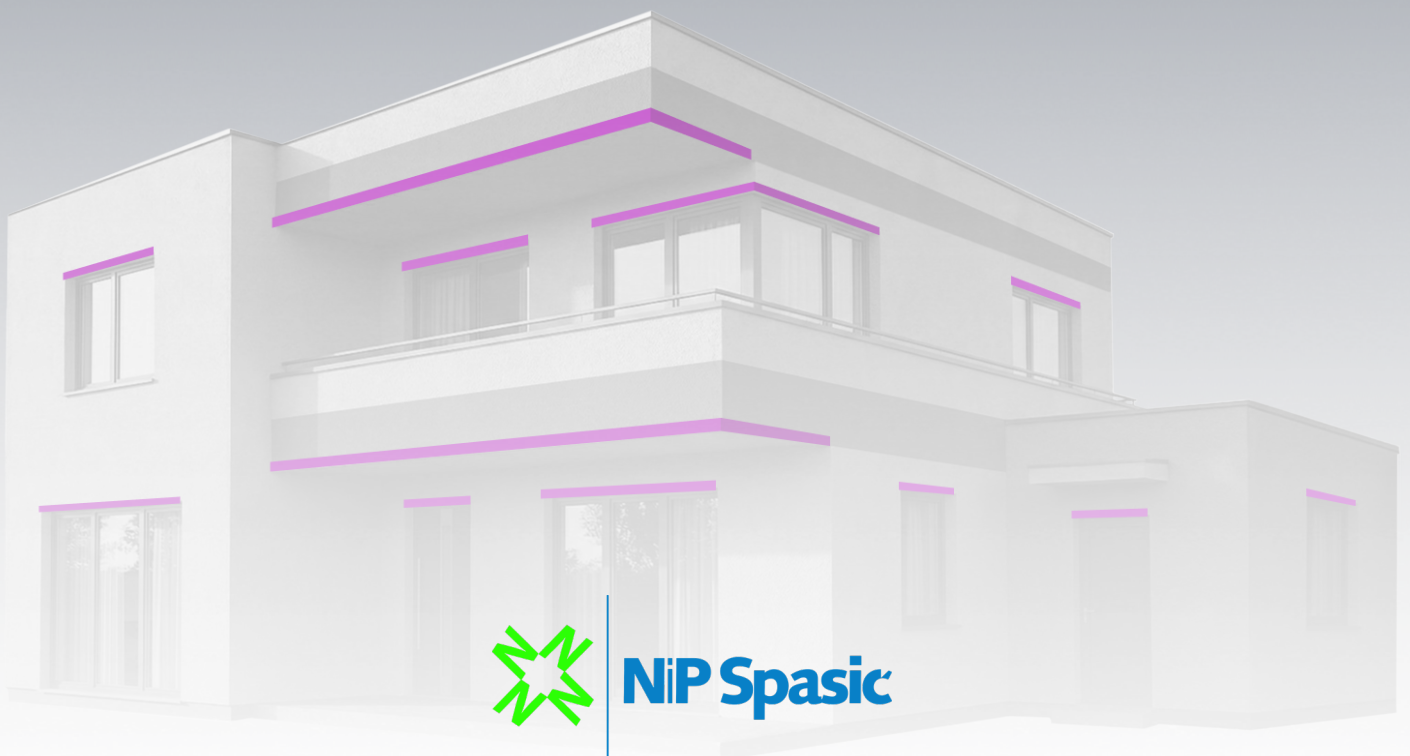


DP TT

Dripnose TT

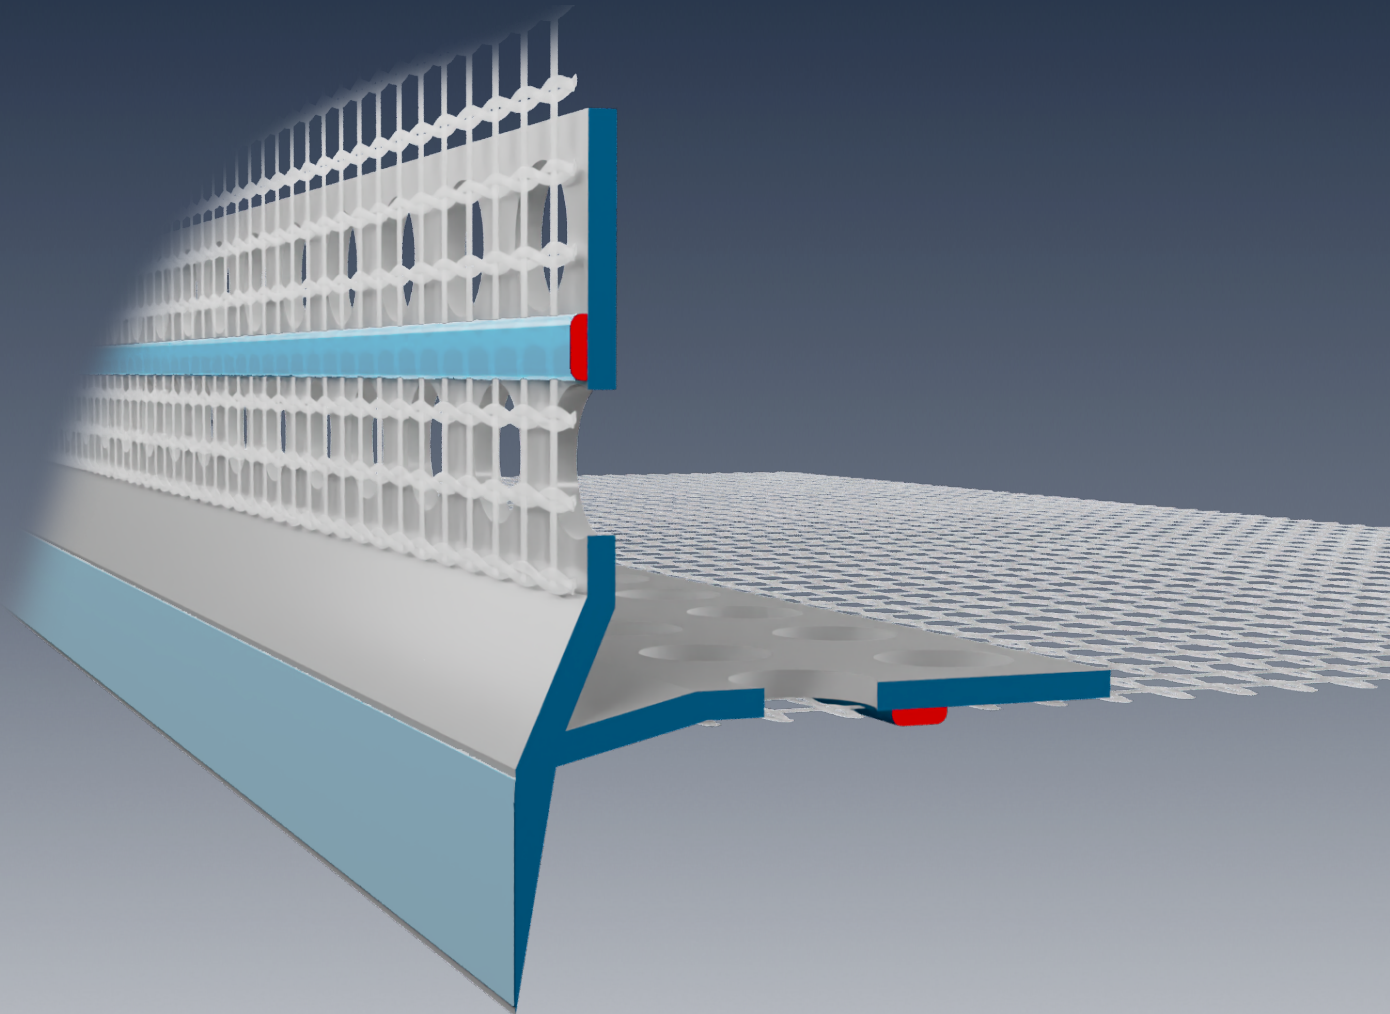

NiP Spasic

Dripnose TT

Length 2m / 2,5m / 3m

This profile is used at the base of the ETICS system or above openings to ensure controlled water runoff, preventing moisture from tracking back onto the facade while providing a clean, durable finish.



Hard PVC



Soft PVC





Fiberglass mesh

Mesh: Performance Grade: ETAG 004 Compliant

High Quality mesh


Protective tape

Easily peelable protective tape.
Leaves no residue on the profile.

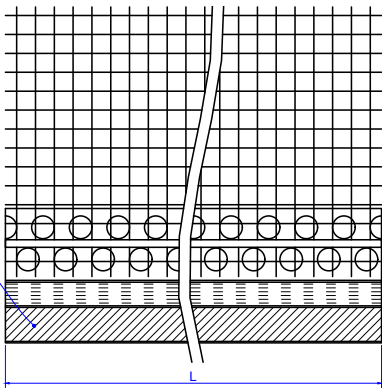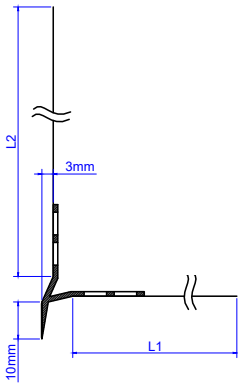

Technical drawing

Application

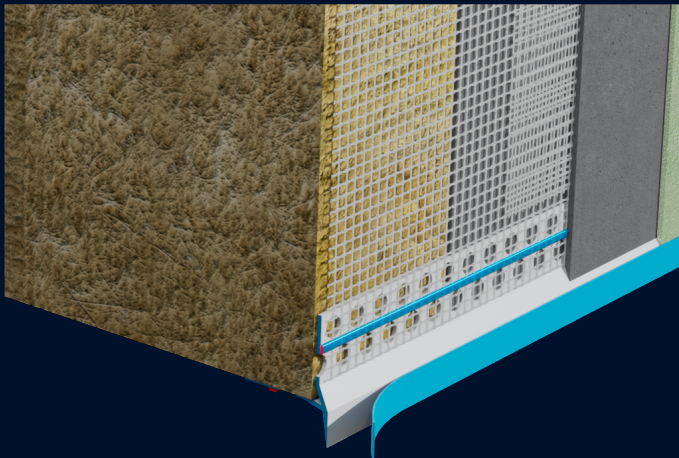

Dimensions

L1 - 10cm / 15cm

L2 - 10cm / 15cm

DRIPNOSE PROFILES



NiP Spasic

1

Apply Adhesive

Apply a layer of facade base coat adhesive onto the surface of the installed insulation boards.

2

Embed the Corner Bead

Press the PVC Drip Profile firmly into the fresh adhesive, making sure the drip edge points downwards, away from the wall. The profile is correctly installed when its mesh flange is fully covered by the adhesive.

3

Finish and Uncover

After applying the final layer of the facade render, carefully remove the protective tape from the profile's edge.

We invite you to reach out to our team to discuss our custom packaging solutions.

Packaging

20pcs

25pcs



Application must be carried out in ambient temperatures between +5°C and +35°C*.



Installation is to be performed by qualified and trained professionals only.



Store at dry place, not directly on Sun.