WPM 6mm PRO

Connecting window profile 6mm PRO with fiberglass mesh

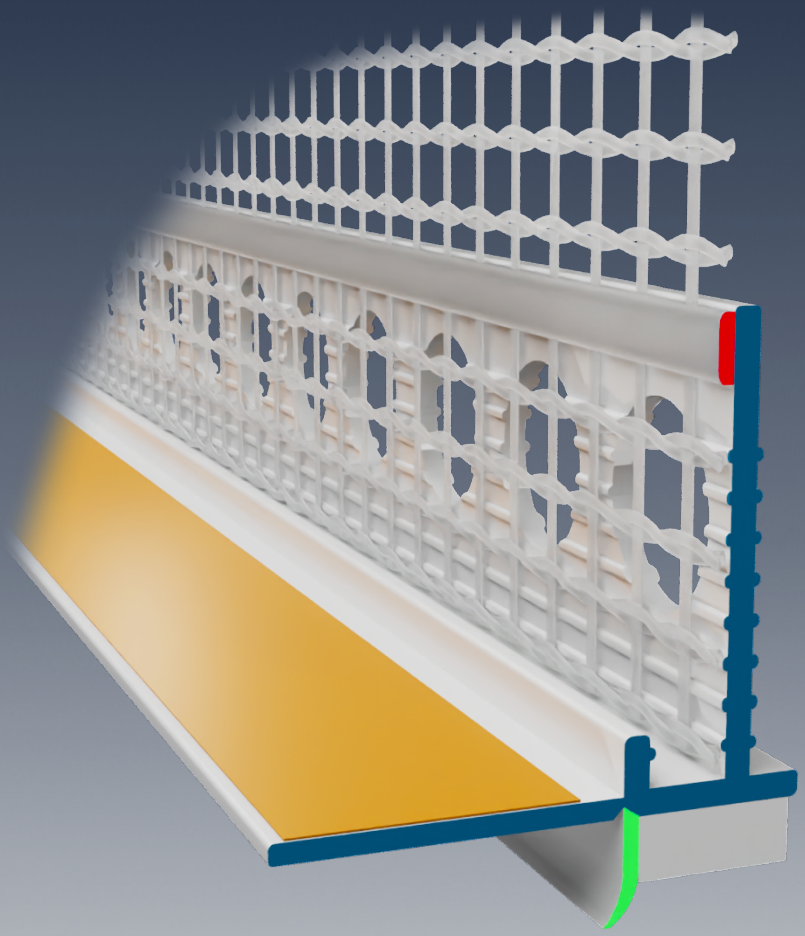

NiP Spasic

Connecting window profile 6mm PRO
with fiberglass mesh

Length 1,4m / 1,6m / 2,4m **Colors**

This profile is designed to create a flexible and weatherproof seal between window/door frames and the external thermal insulation system. It prevents the formation of cracks caused by movement between the frame and the wall. It features a self adhesive strip for attaching protective foil during the plastering process.

- Rigid PVC
- Soft PVC
- TPE
- Fiberglass mesh **Mesh:** Performance Grade: ETAG 004 Compliant
- Tear-off Strip with Double sided adhesive tape
- PE foam tape Rainproof and UV-resistant tape

Application

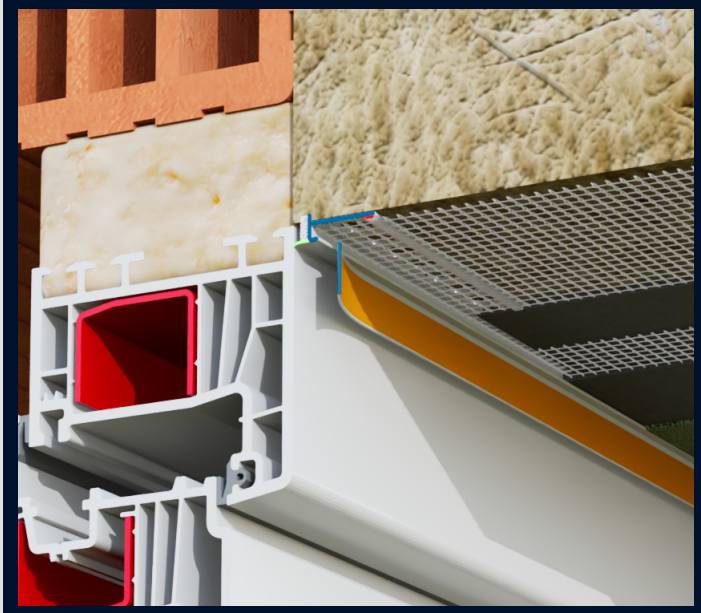

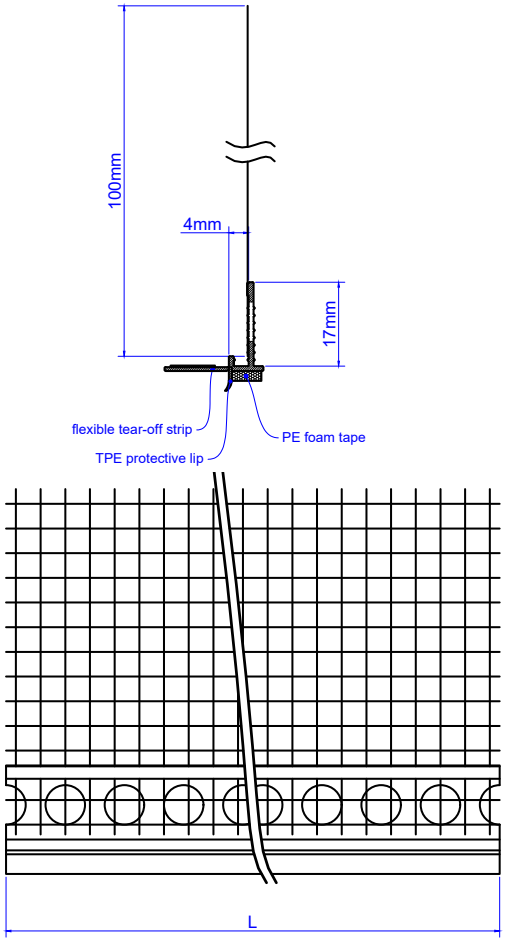

Technical drawing

WINDOW PROFILES

with fiberglass mesh

NiP Spasic

1 Frame Preparation*

Ensure the window or door frame is completely clean, dry, and free of any dust or grease.

2 Attach the Profile

Remove the protective liner from the self-adhesive PE foam tape on the profile. Press the profile firmly onto the frame, ensuring it is applied straight and makes solid contact along its entire length.

3 Apply Protective Film

Remove the liner from the adhesive strip located on the profile's tear-off strip. Attach protective foil to this strip, ensuring it covers the entire glass and frame surface to protect it from render.

4 Embed the Mesh

Apply the facade base coat adhesive around the frame. Fully embed the profile's integrated fiberglass mesh into the fresh base coat, ensuring it is flat and smooth.

5 Finish and Detach

After the final facade render is complete and has dried, first peel away the protective foil. Then, cleanly snap off the tear-off strip along its built-in groove to reveal a perfect, clean edge.

We invite you to reach out to our team to discuss our custom packaging solutions.

Packaging	
50pcs	30pcs

***When to Install:** Install the profile after the thermal insulation boards have been fixed to the wall, but before the main layer of base coat adhesive and reinforcing mesh is applied.